




DISTRIBUTED BY:
AUSTRALIAN TIMBERS

273 MAGILL ROAD, TRINITY GARDENS SA 5068
PH: 08 8332 2666 FAX: 08 8332 0825
WWW.AUSTRALIANTIMBERS.COM
ENQUIRIES@AUSTRALIANTIMBERS.COM

MURA TILE

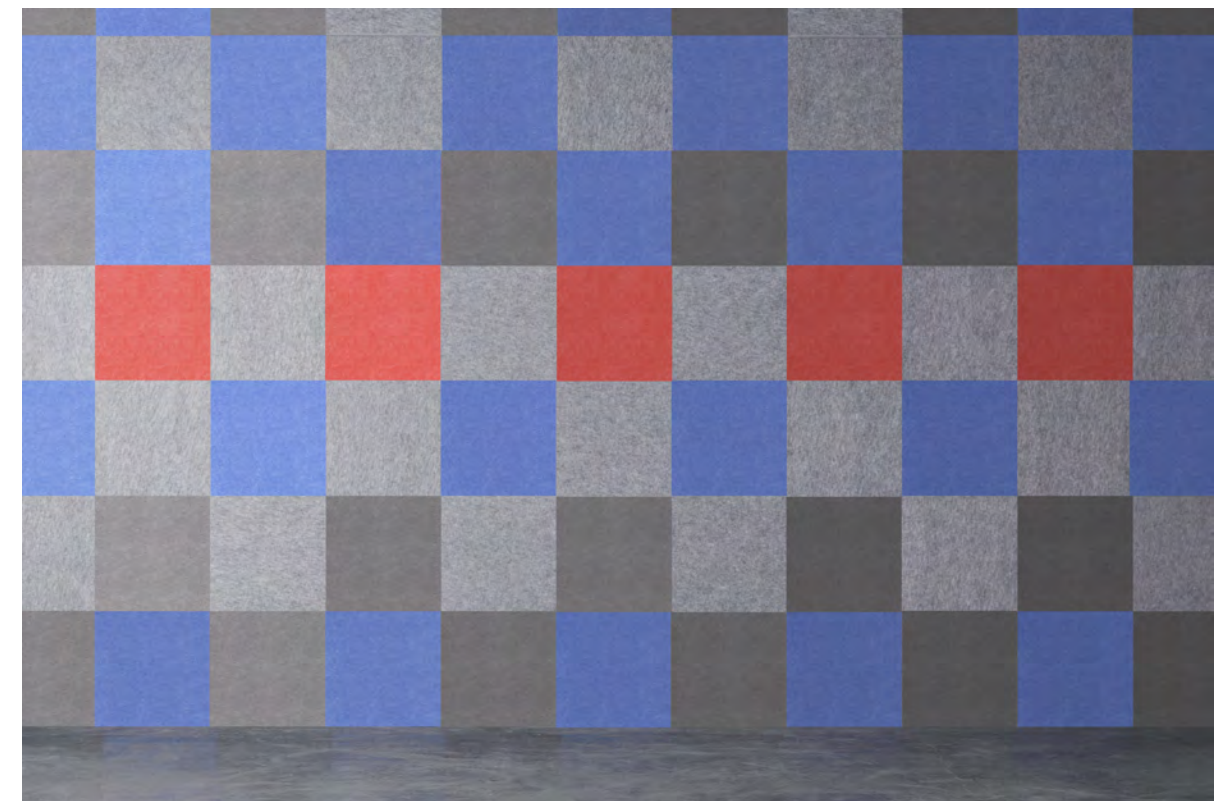

The peel'n'stick Acoustic Tile collection made from award-winning **ECHOPANEL**®



TILE TOOL


CONFIGURE YOUR OWN DESIGN - TILETOOL.WOVENIMAGE.COM

MURA TILE

Woven Image®'s acoustic tile collection Mura Tile, provides an endless stream of design options and configurations that can be created for a number of settings and spaces. Whether it's to create acoustic privacy or to effectively and efficiently control noise in the open-plan office, cafe, lobby, classroom or restaurant, Mura Tile is a designer's key for achieving the required acoustic function in a space with quality design.

Mura - a product of the EchoPanel® product range - exudes a high-quality designer surface finish. The tiles are sold in a box of 8 tiles per colourway and can easily be installed with the 'peel'n'stick' backing once walls or surfaces have been properly prepared. For a perfect finish, Mura Tape can be ordered separately to edge the tiles once installed.

Mura Tile Strobe is proudly made in Australia and following suit of our other products has a low VOC.

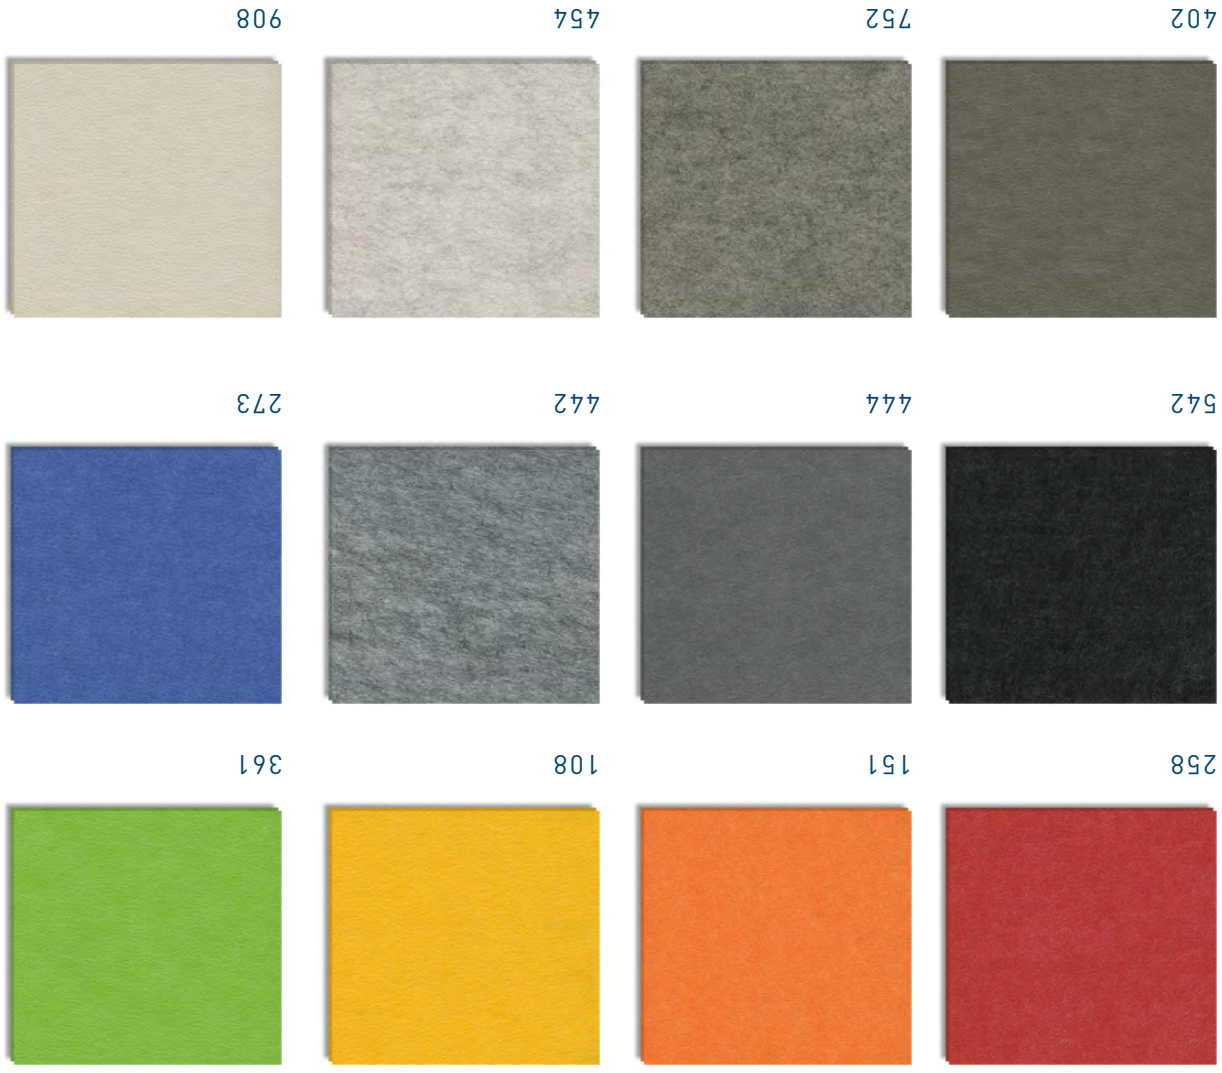

ACTUAL PRODUCT MAY VARY IN COLOUR. SWATCHES NOT TO SCALE AND ARE REPRESENTATIONAL ONLY.

WOVENIMAGE.COM

MURA TILE

SPECIFICATIONS

DESIGN NAME	MURA TILE
DESIGNER	WOVEN IMAGE
ORIGIN	AUSTRALIA
COLOURS	12
COMPOSITION	12MM ECHOPANEL® - 100% PET (60% RECYCLED) & MURA SURFACE - 100% PET (60% RECYCLED) WITH ADHESIVE BACKING.
TILE DIMENSIONS	500MM X 500MM (+/- 5MM)
THICKNESS	13MM (+/- 7%)
WEIGHT	APPROX. 2750g/m ² (+/-10%), 6.5kg PER BOX
TILES PER BOX	8 (ONE COLOURWAY PER BOX)

PERFORMANCE

COLOUR FASTNESS TO LIGHT ISO 105-B02-1994 RATING: 6-7

FIRE TEST AS 3837: GROUP 3, ISO 5660: GROUP 3

CARE

BLOT EXCESS SPILLS FROM MATERIAL QUICKLY. WIPE WITH A DAMP CLOTH. WARNING, AVOID EXCESSIVE AMOUNTS OF WATER. SEE ONLINE FOR MORE INFO:

WOVENIMAGE.COM

USE



SOUND ABSORPTION AS ISO 354 - 2006

NRC VALUE: 0.45 (WITH NO AIR GAP)

VOC EMISSIONS ASTM D5116 RATE:

LESS THAN 0.055 MG/M²/HR (7 DAYS)

ENVIRONMENTAL ECHOPANEL® & MURA ACHIEVES GREENTAG

GREENRATE: LEVEL A



EXACT COLOUR MATCHING CANNOT BE GUARANTEED BETWEEN BATCHES.